ADVENTUITY

FLOOD LINE SERVICES · SOUTH AFRICA

1:50 and 1:100 year flood lines
Reports, A3 drawings and CAD files for township establishment, building plans, mining, water use licences and bridge or culvert design.


CAPABILITY STATEMENT

Flood lines determined by civil engineers, delivered as a fixed-fee package in days, not months.


Adventuity (Pty) Ltd prepares flood line determinations and flood studies for planners, surveyors, architects, environmental practitioners, developers and municipalities anywhere in South Africa, quoted as a fixed fee within one working day of receiving the site.

What you receive

- **Flood line report**: hydrology to the SANRAL Drainage Manual with a frequency analysis of the rainfall recorded near the site; HEC-RAS-type hydraulics with bridges, culverts and weirs; a two-dimensional check. Ready for submission.
- **A3 drawings**: flood line plan on your survey or satellite imagery with the SG property boundary, long section, cross-sections and catchment plan.
- **Files for your team**: DXF, HEC-RAS geometry, GeoJSON, KML for Google Earth and the flood line coordinates (Hartebeesthoek94 Lo).
- **Certification** by an ECSA-registered professional engineer for approval submissions.



Flood line plan with the 1:50 and 1:100 year lines, a road bridge and a culvert

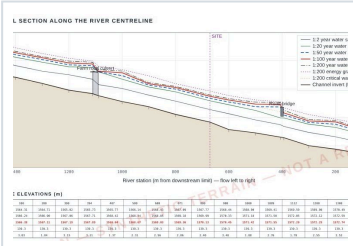

Long section with the computed water surfaces

1. **Send the site**
   Coordinates, an erf number or a pin on the map; free desktop check the same day.
2. **Fixed-fee quote**
   Within one working day, deliverables and turnaround set out.
3. **Analysis**
   On your survey or LiDAR; global terrain for desktop studies.
4. **Delivery**
   Report, drawings and files, one revision round included.

Who we work for

- Town planners: township establishment, rezoning, subdivision
- Land surveyors and architects: building plans and SDPs
- Environmental practitioners: WULAs, EIAs, basic assessments
- Mines and industry: GN 704 compliance
- Developers, lenders and buyers: flood risk before committing
- Consulting engineers: specialist input on their projects

Typical fees and turnaround

Desktop flood line study Single erf or small site, available terrain, report and plan · 5 working days	**from R6 500**
Flood line report for approval On your survey or LiDAR; report, A3 drawings, CAD and HEC-RAS files · 10 working days	**from R16 500**
Township, mining or large catchment With bridges, culverts and stormwater · quoted per site	**from R35 000**
Bridge or culvert hydraulic check Flood levels, afflux, freeboard, inlet and outlet control	**from R9 500**
Pre-purchase flood risk letter Buyers, agents and lenders · 3 working days	**R2 500**

Fees exclude survey work and disbursements. Adventuity (Pty) Ltd is not VAT-registered. Turnaround counts from receipt of the terrain data.

www.adventuity.co.za
Free online flood check of any site on the website · quotes within one working day

Adventuity (Pty) Ltd · Civil engineering
082 397 6521
Nthastara@yahoo.com